Install-A-Door
DOOR HOLDER
Instructions

1. Install four HOLDERS on the stop side of the rough opening, horizontally and four HOLDERS on the hinge side, vertically. Make sure HOLDERS are smooth side to the wall and snug. You may need to adjust later.

Note: Holes for HOLDERS are 6" down and 3/4" over from the rough opening. Bottom holes are 6" up and from the bottom 3/4" over. See illustration.

2. Place door & frame into rough opening. Hinges facing you.

3. Turn HOLDERS 90 degrees / horizontal on the frame (4 places.)

4. Center Door and Frame into rough opening. Make adjustments and shim at the top-sides of the frame. This should center door/frame into rough opening.

5. Level Hinge side first. Place shims at hinge area and nail.

6. Place shims on the Latch side making sure reveal is equal space between door and frame. Open and close door to check operation. If correct nail into place.

Note: About same location as hinge side

7. Cut all shims level with wall and remove HOLDERS.

8. Trim door out.

9. Door Install Complete.

SEE NOTES

Doors always open into room. Hinges go on room side

Door Holder — *Smooth side of holder always goes against the wall.*

Mounting of Holders — *Holes for holders and screws are 6" down and 3/4" over from rough opening and 6" up from the bottom and 3/4" over.*

Holders Mount to backside of wall. Opposite door opening side.

Reveal *(space between the frame and door) — should be close to equal space at the top and latch side as possible.*

Shims — *Place shims at door hinge area.*

Smooth Side of Holder against Wall



Screw Side of Holder

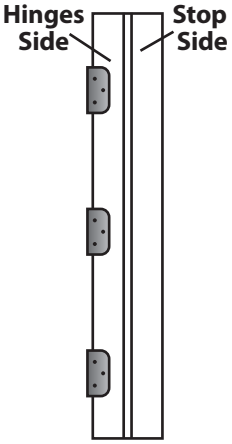

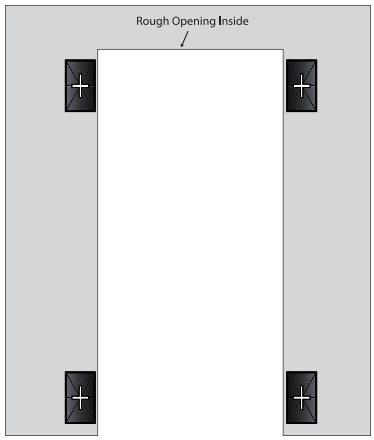

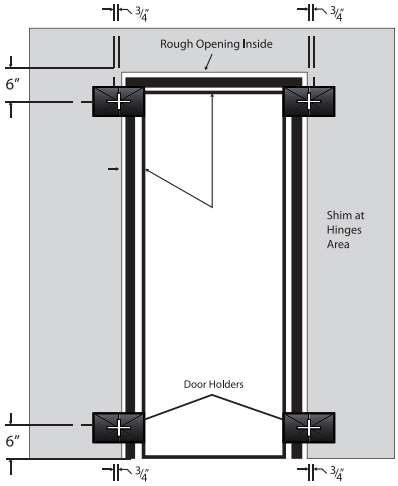

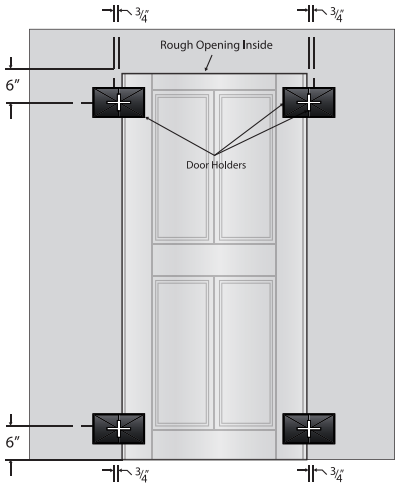

Pan Head Screw